

Shenzhen Leadtek Electronics Co. Ltd

PRODUCT SPECIFICATION

TFT-LCD MODULE

Module No: LTK035HVCLM54-V0

☒ Preliminary Specification

☐ Approval Specification

Designed by	Checked by	Approved by
		

Final Approval by Customer

Approved by	Comment

※The specification of TBD should refer to the measured value of sample . If there is difference between the design specification and measured value we naturally shall negotiate and agree to solution with customer.



1.Document Revision History

Version	Contents	Date	Note
V0	Initial version	2025.05.26	



1. Introduction

1.1 Scope of application

This specification applies to the LCD module that is supplied by Leadtek Technology CO., LTD.

LCD specification: Dots 320xRGBx480

As to basic specification of the driver IC, refer to the IC (ILITEK:ILI9488) specification and data book.

All material & processing of the LCD module should be Lead Free.

1.2 TFT features:

Structure: TFT PANNEL+IC +FPC+BL;

ALL O'CLOCK Type LCD

320 dot-segment and 480 dot-common outputs;

262K Color can be selected by software;

White LED back light;

8/9/16bit MCU Interface

1.3 Applications:

2. General Description

NO	Item	Specification	Unit
1	LCD Size	TFT"3.5	inch
2	Panel Type	IPS	mm
3	Display Resolution	320 x RGB x 480	pixel
4	Display Mode	Normally Black	-
5	Number of Colors	262K	-
6	Viewing Direction	ALL	-
7	LCM Module size	54.48(W)×84.71(H)×2.20(T)	mm
8	Panel Active Area	48.96(W)×73.44(H)	mm
9	Pixel Pitch	0.153 (H) x 0.153 (V)	mm
10	LCM Driver	ILI9488	-
11	Light Source	White LED	-
12	LCM Interface	MCU	bit
13	Approx. Weight	19.5	g



Note : Please refer to the mechanical drawing

3. Mechanical Drawing

Front View

Side View

Back View

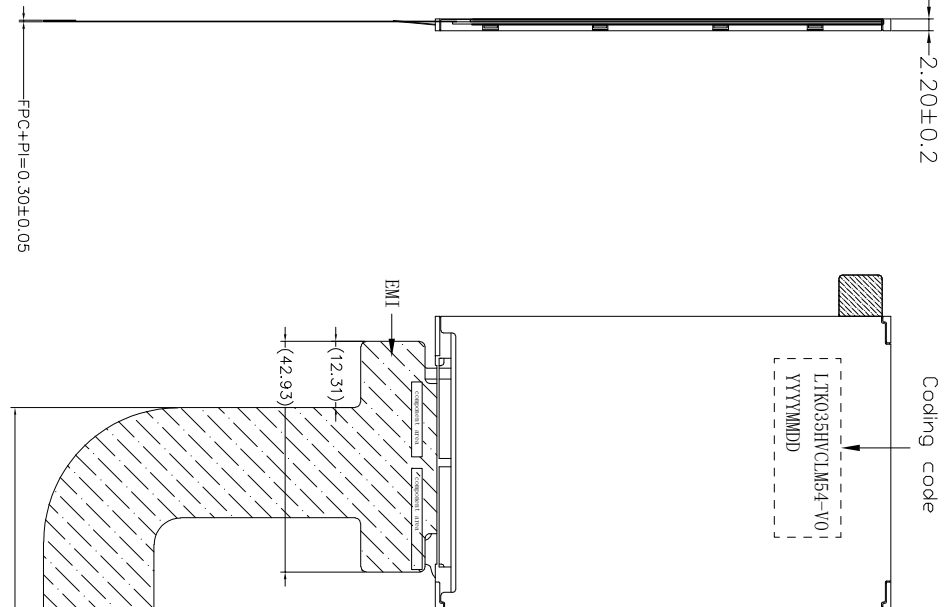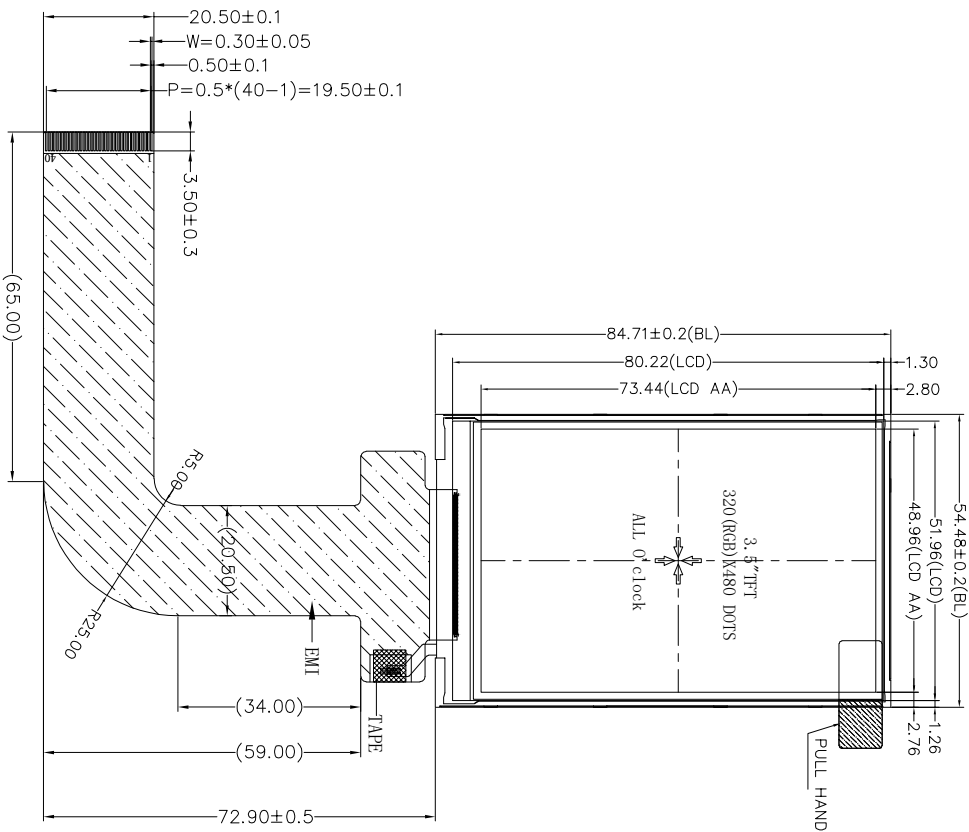

PIN ASSIGNMENT									
1	GND	11	NR/SPI SCL/SCK	21	DB4	31	DB14	41	IM2
2	GND	12	RD	22	DB5	32	DB15	42	
3	GND	13	GND	23	DB6	33	A	43	
4	GND	14	GND	24	DB7	34	K	44	
5	GND	15	RESET	25	DB8	35	K	45	
6	IMCC1(B/28V)	16	GND	26	DB9	36	K	46	
7	VC1(2.8V)	17	DB0	27	DB10	37	GND	39	IM1
8	GND	18	DB1	28	DB11	38	IM0	40	
9	CS/SPI CS	19	DB2	29	DB12	39	IM1		
10	RS	20	DB3	30	DB13				

- Notes:
1. Display : 3.5", TFT
 2. Resolution: 320xRGBx480
 3. LCD Viewing Direction: ALL,
 4. Drive IC: IL19488
 5. Display Mode: Normally Black/Transmissive
 6. LCM Brightness: 300cd/m² (TYP), uniformity ≥80%
 7. unmark Tolerance: ±0.2
 8. OPERATING TEMP: -20° C ~ +60° C
 9. STORAGE TEMP: -30° C ~ +70° C
 10. Requirements on Environmental Protection: ROHS

REV	DESCRIPTION	DATE	NAME
1	NEW	2025.05.23	kevin



Shenzhen Leadtek Electronics Co., Ltd

SCALE: 1/1

UNIT: mm

PAGE: 1/1

Part No: LTK035HVC1M54

Cus tomer No:

VER: V0

IAN

JONA

kevin

4.Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit
LCM Operating Temperature	T _{OPR}	-20	60	C
LCM Storage Temperature	T _{STG}	-30	70	C
Humidity	RH	-	90	

5.Electrical Characteristics

5.1 TFT DC Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage for I/O	VDDIO	1.65	1.8	3.3	V
Supply Voltage for(DC/DC)	VDD	2.7	2.8	3.3	V
Supply Voltage for(DC/DC)	AVDD				V
Supply Voltage for(DC/DC)	AVEE				V

5.2 Back-Light Unit Characteristics


The back-light system is an edge-lighting type with 6 white L Ds. The characteristics of the back-light are shown in the following tables.

Characteristics	Symbol	Min.	Type	Max.	Unit	Notes
Forward Voltage	V _F	2.8	-	3.2	V	-
Forward current	I _F	--	120	-	mA	-
Luminance(With LCD)	L _v		300	--	cd/m ²	-
LED life time	N/A	----	30,000	--	Hr	Note 1

Note:

(1) The “LED life time” is defined as the module brightness decrease to 50% of original brightness at I_L=20mA/LED. The LED life time could be decreased if operating I_L is larger than 25mA/LED.

Backlight circuit diagram shown in below:

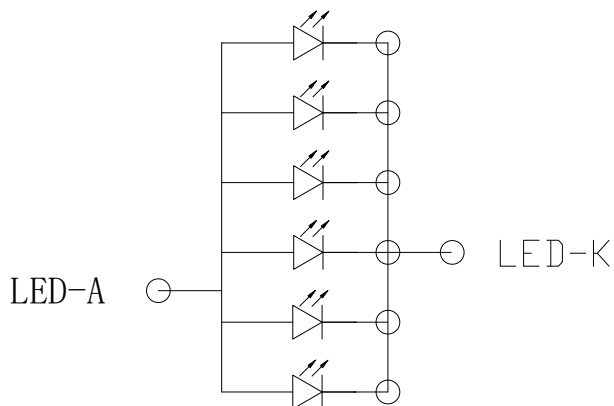


6. Module Function Description

Pin No.	Symbol	Functional	Notes																				
1	GND	Ground																					
2	GND	Ground																					
3	GND	Ground																					
4	GND	Ground																					
5	GND	Power Ground																					
6	IOVCC	I/O Voltage (IOVCC to DGND): 1.65V ~ 3.3V																					
7	VCI	Power supply : 2.7V ~ 3.3V																					
8	GND	Ground																					
9	CS	Chip select signal input pin																					
10	RS	Register select signal.																					
11	WR/SCL	Write strobe signal/ pin as Serial Clock when operates in the serial																					
12	RD	Read data at the rising edge.																					
13	GND	Ground																					
14	GND	Ground																					
15	RESET	Reset signal input terminal. Active at ‘L’.																					
16	GND	Power Ground																					
17-32	DB0~DB15	Data bus																					
33	LEDA	Power supply for backlight anode input terminal.																					
34~36	LEDK	Power supply for backlight cathode input terminal.																					
37	GND	Power Ground																					
38	IM0	<table><tr><td>IM0</td><td>IM1</td><td>IM2</td><td>Interface</td></tr><tr><td>1</td><td>0</td><td>1</td><td>3 wire 9-bit date serialinterafce</td></tr><tr><td>1</td><td>1</td><td>1</td><td>4 wire 8-bit date serialinterafce</td></tr><tr><td>0</td><td>1</td><td>0</td><td>80 MCU 16-bit businterface</td></tr><tr><td>1</td><td>1</td><td>0</td><td>80 MCU 8-bit businterface</td></tr></table>	IM0	IM1	IM2	Interface	1	0	1	3 wire 9-bit date serialinterafce	1	1	1	4 wire 8-bit date serialinterafce	0	1	0	80 MCU 16-bit businterface	1	1	0	80 MCU 8-bit businterface	See ili9488 data sheet for details
IM0	IM1	IM2	Interface																				
1	0	1	3 wire 9-bit date serialinterafce																				
1	1	1	4 wire 8-bit date serialinterafce																				
0	1	0	80 MCU 16-bit businterface																				
1	1	0	80 MCU 8-bit businterface																				
39	IM1																						
40	IM2																						

7. Timing Characteristics

DPI (Display Parallel 8-/9-16-/18-/24-bit interface) Timing Characteristics:

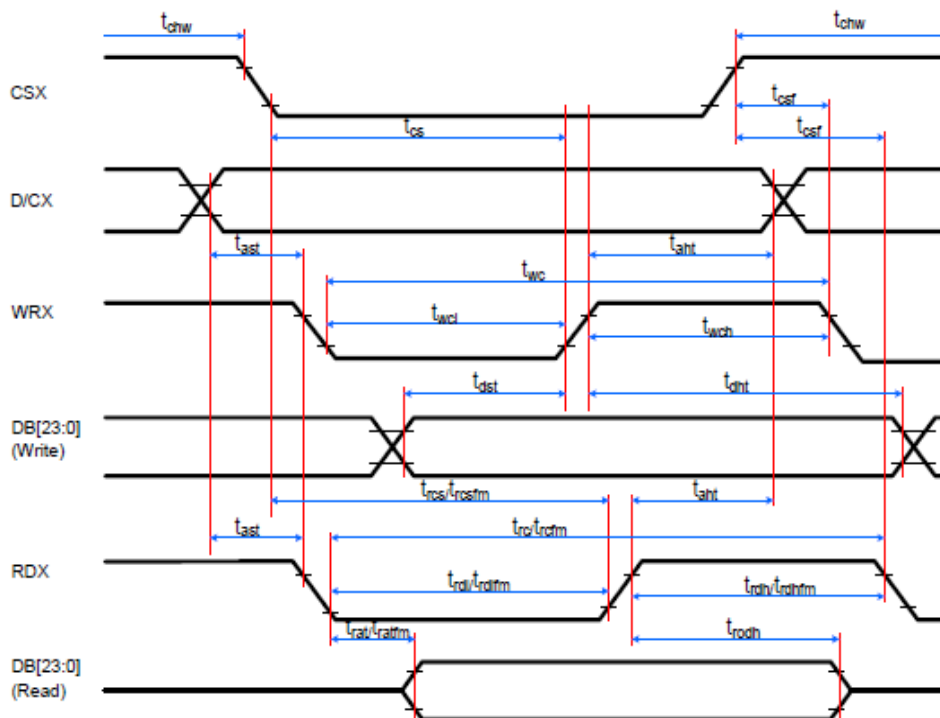

Signal	Symbol	Parameter	min	max	Unit	Description
DCX	tast	Address setup time	0	-	ns	-
	that	Address hold time (Write/Read)	0	-	ns	-
CSX	tchw	CSX "H" pulse width	0	-	ns	-
	tcs	Chip Select setup time (Write)	15	-	ns	-
	trcs	Chip Select setup time (Read ID)	45	-	ns	-
	trcsfm	Chip Select setup time (Read FM)	355	-	ns	-
WRX	tcsf	Chip Select Wait time (Write/Read)	0	-	ns	-
	twc	Write cycle	40	-	ns	-
	twrh	Write Control pulse H duration	15	-	ns	-
RDX (FM)	twrl	Write Control pulse L duration	15	-	ns	-
	trcfm	Read Cycle (FM)	450	-	ns	When read from Frame Memory
	trdhfm	Read Control H duration (FM)	90	-	ns	
RDX (ID)	trdlfm	Read Control L duration (FM)	355	-	ns	When read ID data
	trc	Read cycle (ID)	160	-	ns	
	trdh	Read Control pulse H duration	90	-	ns	
DB [23:0], DB [17:0], DB [15:0], DB [8:0], DB [7:0]	trdl	Read Control pulse L duration	45	-	ns	For maximum, CL=30pF For minimum, CL=8pF
	tdst	Write data setup time	10	-	ns	
	tdht	Write data hold time	10	-	ns	
	trat	Read access time	-	40	ns	
	tratfm	Read access time	-	340	ns	
	trod	Read output disable time	20	80	ns	

Reset Description:

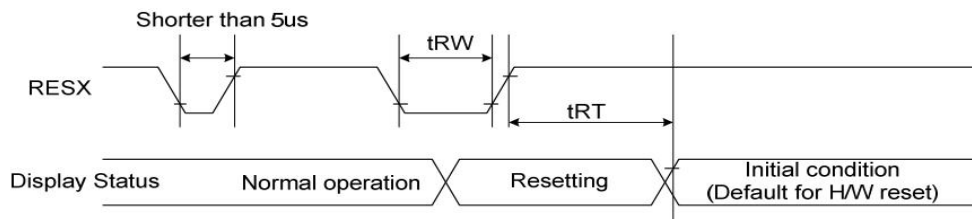


Table 39: Reset Timing


Signal	Symbol	Parameter	Min	Max	Unit
RESX	tRW	Reset pulse duration	10		uS
	tRT	Reset cancel		5 (note 1,5) 120 (note 1,6,7)	mS

Notes:

1. The reset cancel also includes the required time for loading ID bytes, VCOM setting and other settings from the EEPROM to registers. After a rising edge of RESX, this loading is done within 5 ms after the H/W reset cancel (tRT).
2. According to the Table 40, a spike due to an electrostatic discharge on the RESX line does not cause irregular system reset.

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

3. During the Reset period, the display will be blanked (When Reset starts in the Sleep Out mode, the display will enter the blanking sequence in at least 120 ms. The display remains the blank state in the Sleep In mode.) and then return to the default condition for the Hardware Reset.
4. Spike Rejection can also be applied during a valid reset pulse, as shown below:

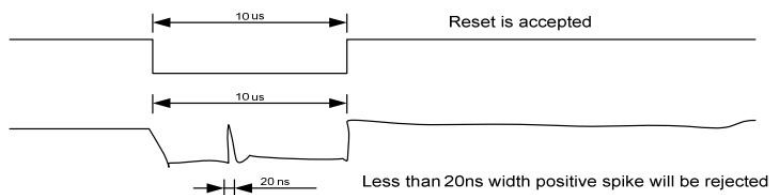

Positive Noise Pulse during Reset Low

5. When Reset is applied during the Sleep In Mode.
6. When Reset is applied during the Sleep Out Mode.
7. It is necessary to wait 5msec after releasing RESX before sending commands. The Sleep Out command also cannot be sent in 120msec.

8.Optical Characteristics

Optical Specification

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time	Tr+Tf	$\theta = 0^\circ$	-	30	40	ms	Note 4
Contrast ratio	CR	$\theta = 0^\circ$		1000	-		Note 2,5
Viewing angle	Top	$CR \geq 10$	70	80	-	deg.	Note 2,5,6
	Bottom	$CR \geq 10$	70	80	-		
	Left	$CR \geq 10$	70	80	-		
	Right	$CR \geq 10$	70	80	-		
Color chromaticity (CF only, light source is C light, CIE 1931)	Rx	$\theta = 0^\circ$	-0.03	0.655	+0.03		Note 3
	Ry			0.317			
	Gx			0.260			
	Gy			0.571			
	Bx			0.144			
	By			0.074			
Color chromaticity (CF only, light source is C light, CIE 1931)	Wx	$\theta = 0^\circ$		0.304			Only for reference
	Wy	$\theta = 0^\circ$		0.327			
NTSC(CF only, light source is C light, CIE 1931)	%	CIE1931	60	70	-	%	Note 3
Transmittance (w/o APCF / w/i CTC Gal SK2 BL)	Trans		3.74	4.4		%	Note 9

Note 1: Ambient temperature = 25°C.


Note 2: To be measured with a viewing cone of 2°by Topcon luminance meter SR3.

Note 3: Definition of color chromaticity (CIE 1931) Color coordinates measured at center point of LCD.

Note 4: Transmittance of Specification is cell with CTC's polarizer and BL.

Note 5: Definition of response time:

The output signals of TRD-100 are measured when the input signals are changed to "White" (rising time) and from "White" to "Black" (falling time), respectively. The interval is between the 10% and 90% of amplitudes. Refer to figure as below.

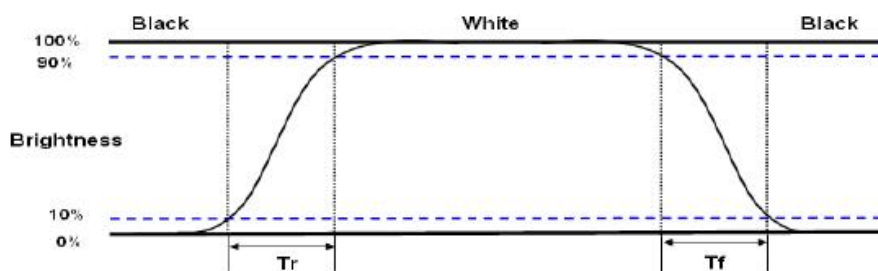


Note 6: Definition of contrast ratio:


Contrast ratio is calculated by the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "white" state}}{\text{Brightness on the "black" state}}$$


Note 7: Definition of viewing angle

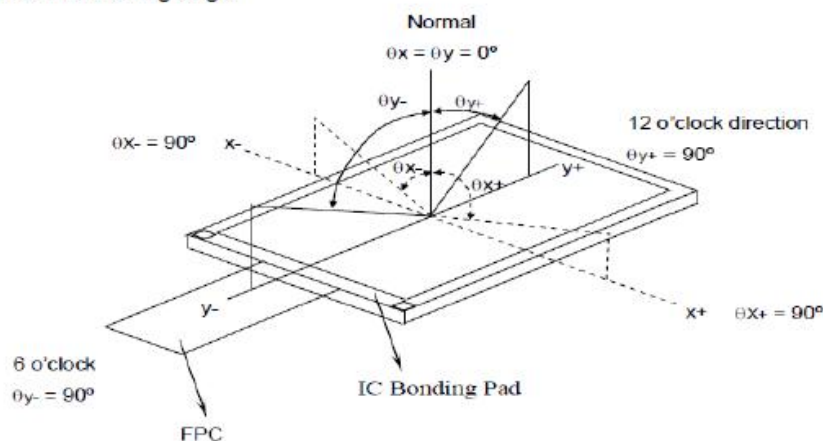

Note 8: Definition of optical measurement system. The optical characteristics should be measured in dark room. The optical properties are measured at the center point of the LCD screen, (Response time is measured by Photo detector TRD_100, other items are measured by SR3.

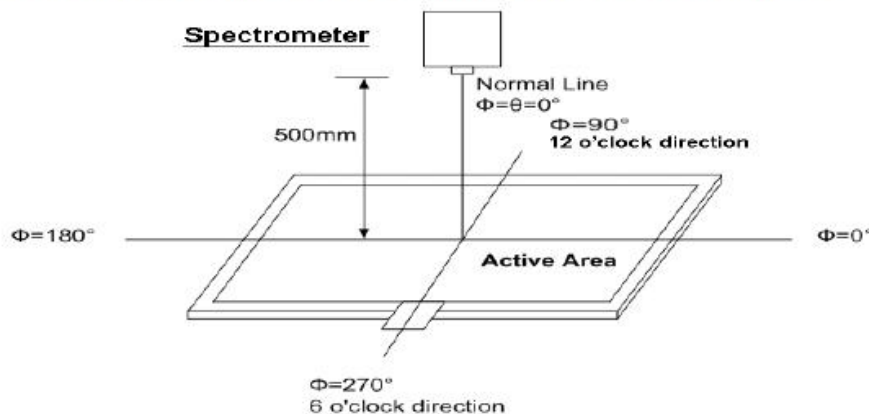

Note 9: The absorption axis direction of polarizer refer to figure as bellow :

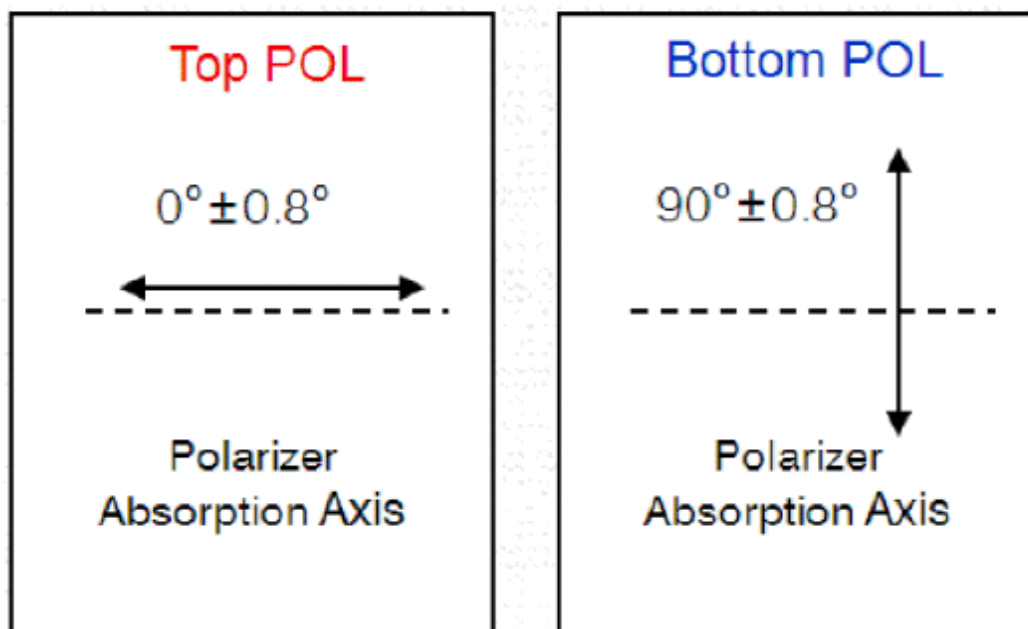

9. Reliability Test Item

No.	Test Item	Test Condition	Notes
1	High Temp. Storage	+70°C / 96H	1. Functional test is OK. Missing Segment, short, unclear segment non-display, display abnormally and liquid crystal leakage un-allowed. 2. No low temperature bubbles, end seal loose and fall, frame rainbow.
2	Low Temp. Storage	-30°C / 96H	
3	High Temp. Operating	+60°C / 96H	
4	Low Temp. Operating	-20°C / 96H	
5	High Temperature / Humidity storage	50°C x 90%RH / 96H	
6	Thermal and cold shock	Static state, -20°C (30min) ~60°C (30min), 50 cycles	

10. Packing Method----TBD

11.0 General Precaution

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

11.2 Assembly Precaution

- 1、 Please use the mounting hole on the module side in installing and do not bending or wrenching LCD in assembling. And please do not drop, bend or twist LCD module in handling.
 - 2、 Please design display housing in accordance with the following guide lines.
 - 3、 Housing case must be destined carefully so as not to put stresses on LCD all sides and not to wrench module. The stresses may cause non-uniformity even if there is no non-uniformity statically.
 - 4、 Keep sufficient clearance between LCD module back surface and housing when the LCD module is mounted. The clearance in the design is recommended taking into account the tolerance of LCD module thickness and mounting structure height on the housing.
 - 5、 Please do not push or scratch LCD panel surface with any-thing hard. And do not soil LCD panel surface by touching with bare hands. (Polarizer film, surface of LCD panel is easy to be flawed.)
 - 6、 Please do not press any parts on the rear side such as source IC, gate IC, and FPC during handling LCD module. If pressing rear part is unavoidable, handle the LCD module with care not to damage them.
 - 7、 Please wipe out LCD panel surface with absorbent cotton or soft cloth in case of it being soiled.
 - 8、 Please wipe out drops of adhesives like saliva and water on LCD panel surface immediately. They might damage to cause panel surface variation and color change.
- 11.2.7 Please do not take a LCD module to pieces and reconstruct it. Resolving and reconstructing modules may cause them not to work well.

11.3 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. Leadtek does not warrant the module, if customers disassemble or modify the module.

11.4 Breakage of LCD Panel

- 1、 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 2、 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 3、 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 4、 Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.5 Absolute Maximum Ratings and Power Protection Circuit

- 1、 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 2、 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 3、 It's recommended employing protection circuit for power supply.

11.6 Operation

- 1 、 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 2、 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 3 、 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 4 、 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

11.6 Static Electricity

- 1 、 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 2、 Because LCD module uses CMOS-IC on TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.
- 3 、 Persons who handle the module should be grounded through adequate methods.

11.7 Disposal

When disposing LCD module, obey the local environmental regulations.

11.8 OTHERS

- 1 、 A strong incident light into LCD panel might cause display characteristics' changing inferior because of polarizer film, color filter, and other materials becoming inferior. Please do not expose LCD module direct sunlight land strong UV rays.
- 2、 Please pay attention to a panel side of LCD module not to contact with other materials in preserving it alone.
- 3、 For the packaging box, please pay attention to the followings:
- 4、 Packaging box and inner case for LCD are designed to protect the LCDs from the damage or scratching during transportation. Please do not open except picking LCDs up from the box.
- 5、 Please handle packaging box with care not to give them sudden shock and vibrations. And also please do not throw them up.
- 6、 Packing box and inner case for LCDs are made of cardboard. So please pay attention not to get them wet. (Such like keeping them in high humidity or wet place can occur getting them wet.)



深圳市丽台电子有限公司

Shenzhen Leadtek Electronics Co.,Ltd

Incoming Inspection Standard

品质允收标准

Model N0. /产品型号: Applicable to Leadtek Touch Display ScreenUpdated Date /生效日期: 2025.04.01Version / 版本号: V0

Record of Revision /修订履历.

Version /版本号	Revision Record /修订内容	Reviser /修订人	Revision Date /修订日期
V0	首发 / Initial release	Green	2025.04.01



1、Scope of application /适用范围.

适用于丽台电子触摸显示屏/ Applicable to Leadtek Touch Display Screen.

2、Inspection conditions and environment / 检验条件与环境.

2.1、Inspection Conditions / 检验条件:

2.1.1、Inspection Distance / 检测距离: 35cm $\pm$ 5cm.

2.1.2、Inspection time /检验时间: Displays performance test /功能测试: 2~3S /Image,


Appearance Inspection / 外观检验: 8~10S.

2.1.3、Inspection the viewing angle /检验视角:

Display Inspection Angle /显示检验角度: $\pm 45^\circ$.

Appearance Inspection Angle /外观检验角度: $\pm 45^\circ$.

Eye position /眼睛位置:

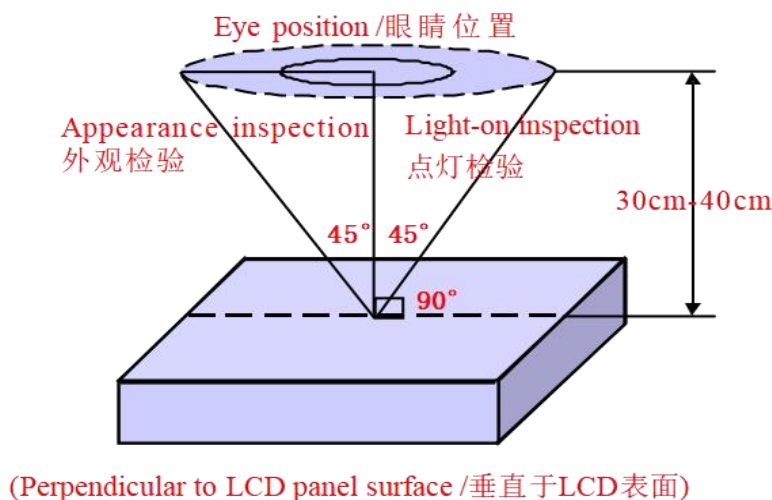

2.2、Inspection environment /检验环境:

Temperature / 温度		25 $\pm$ 5 $^\circ$ C
Humidity / 湿度		55 $\pm$ 5%RH
Brightness 亮度	Appearance Inspection / 外观检验	800~1000 Lux
	Display Inspection / 功能检验	200~300 Lux

2.3、Sampling conditions / 抽样方式.

Sampling Plan /抽样计划		GB/T 2828.1- 2003
		Batch single sampling/批量单次抽样
		General inspection level: II/一般检验水平: 二级
AQL	Major Defect /主要缺陷	0.25
	Minor Defect /次要缺陷	0.65

3、Terms and definitions /术语和定义.

3.1、Defect classification / 缺陷分类:

3.1.1、Major defects /主要缺陷: Defects that cause the product to fail or reduce the usability of the product / 引起产品功能失效和减少产品的有效使用与操作的缺陷.

3.1.2、Minor defects / 次要缺陷: Defects that do not affect the functionality and effective use and operation of the product / 不影响产品功能和有效使用与操作的缺陷.


3.2、Point defects / 点状缺陷:

The size of a punctate defect is defined by the diameter D, and the average diameter of the defect is $D=1/2(W+L)$ / 点状缺陷由直径 D 定义大小, 缺陷的平均直径 $D=1/2(W+L)$.

3.3、line defects / 线状缺陷:

When defect size $L \geq 2W$, the defect count as liner type defect. Size of linear defect is defined by length (L) and the maximum width (W)

当缺陷尺寸 $L \geq 2W$ 时, 被视为线状缺陷, 线状缺陷是由长度 (L) 和最大宽度 (W) 定义的.

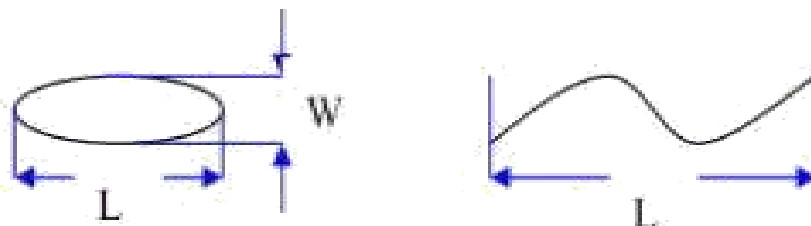

3.4、LCD sub-pixels / LCD 子像素点:


The sub-pixel defect area is greater than 50% of the LCD sub-pixel area, and is visible through ND5% masking

子像素点缺陷面积大于 50% LCD 子像素面积, 且透过 ND5%遮盖是可见的.

3.5、ND card test method / ND 卡检验方法:

Hold the ND card about 5cm above the display area, with your eyes 30-40cm away from the panel, and observe for 2~3 seconds

在显示区域上方大约 5cm 处握住 ND 卡, 眼睛距离面板 30-40cm, 观察 2~3 秒.

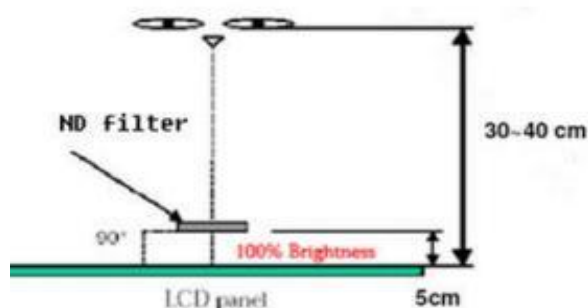

3.6、Surface substances that can be cleaned are not considered defects (e.g. finger prints on the protective film, dust particles)

可以被清洁干净的表面物质不视为缺陷 (如保护膜上的手指印, 尘粒) .

3.7、Defects that can be covered by the material and are not visible to the eye, and do not affect the function and use are not considered defects

能被物料覆盖目视不可见, 且不影响功能与使用的缺陷不视为缺陷.

3.8、AA shows that damage to the glass outside the area does not affect the effective line and does not expand the loss is acceptable

AA 显示区域以外的玻璃损伤, 不影响有效线路和不会在扩大损失的是可以接受的.

3.9、Issues not specified or defined in this document shall be dealt with through friendly negotiation between the parties / 本文件中未规定或定义的问题, 双方友好协商处理.

4.0、Inspection standards /检验标准:

4.1、Structural size standards / 结构尺寸标准:

Measurement items /测量项目		Specification /规格	Remark /备注
Name/名称	Unit /单位	Tolerance /公差	
Outside dimension: Length 尺寸: 长	mm /毫米	0.10mm~0.3mm	Please refer to the product specification for detailed dimensions and tolerances 详细的尺寸规格和公差请参考产品规格书
Outside dimension: Width 尺寸: 宽	mm /毫米	0.10mm~0.3mm	
Outside dimension: Thickness 尺寸: 厚	mm /毫米	0.20mm~0.50mm	

4.2、Appearance Inspection standards:

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
LCD	ITO	Full size 全尺寸	ITO can't open circuit, short circuit, ITO notch cannot exceed 70% of width. ITO 不能有开路和短路, ITO 缺口不能超过宽度的70%.	MA	
	Corners broken 崩边/崩角	Full size 全尺寸	1、 It cannot affect the appearance of valid routes and functions; 不能影响有效线路和功能外观.	MA	
			2、 There must be no extensible rips 不能有可延伸性裂纹.	MA	
Silicone 硅胶	Silicone coating 硅胶涂布	Full size 全尺寸	1、 The height cannot exceed the LCD CF surface / 高度不能超过 LCD CF 面.		MI
			2、 No overflow and lack of glue / 不能溢胶和缺胶.		MI
			3、 Silicone cannot cover POL and FPC/ 硅胶不能覆盖到 POL 和 FPC.		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
PCBA FPC Connector 连接器	Appearance 表面外观	Full size 全尺寸	1.FPC is not allowed to have drape/bubble/fold / 不允许有披锋/气泡/褶皱.		MI
			2.Surface scratches do not allow copper leakage / 表面划伤不允许出现漏铜.	MA	
			3.Cracking is not allowed / 不允许破裂.	MA	
			4.Gold finger oxidation is not allowed 不允许金手指氧化.	MA	
			5.Chromatic aberration is not allowed 不允许出现色差.	MA	
	Components 元器件	Full size 全尺寸	1. Damage, missing parts, and incorrect models are not allowed 不允许损伤、缺件、型号错误.	MA	
			2.Components need to be insulated with high temperature adhesive (unless not required by the drawings) / 元器件需要有高温胶绝缘保护 (除非图纸无要求) .		MI
	Weld 焊接	Full size 全尺寸	1. False soldering, virtual soldering, and tinning are not allowed 不允许假焊、虚焊、连锡.	MA	
			2. No solder bead residue is allowed 不允许有锡珠残留.		MI
			3.The pads need to be glued with high temperature (unless not required by the drawings) / 焊盘需贴高温胶 (除非图纸无要求) .		MI
POL 偏光片	Scratches 划伤	Under 6 inches 6 寸以下	1. $W \leq 0.05\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.05\text{mm} < W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$; $N \leq 2$; $DS \geq 10\text{mm}$. 3. $0.10\text{mm} < W$; $5\text{mm} < L$, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1. $W \leq 0.07\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.07\text{mm} < W \leq 0.12\text{mm}$; $L \leq 10\text{mm}$; $N \leq 3$; $DS \geq 10\text{mm}$. 3. $0.12\text{mm} < W$; $10\text{mm} < L$, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1. $W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.10\text{mm} < W \leq 0.15\text{mm}$; $L \leq 10\text{mm}$; $N \leq 4$; $DS \geq 10\text{mm}$. 3. $0.15\text{mm} < W$; $10\text{mm} < L$, Not allowable (不允许) .		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
POL 偏光片	Bubbles	Under 6 inches 6 寸以下	1.D $\leq$ 0.15mm, Ignore (忽略) . 2.0.15mm < D $\leq$ 0.30mm; N $\leq$ 2; DS $\geq$ 10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		More than 6 inches 6 寸以上	1.D $\leq$ 0.20mm, Ignore (忽略) . 2.0.20mm < D $\leq$ 0.40mm; N $\leq$ 3; DS $\geq$ 10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
	Bubbles around the edges 边缘气泡	Full size 全尺寸	1.Within 1/2BM of the display area, it is not allowed 显示区往外 1/2BM 区域内, 不允许. 2.The display area is 1/2 outside the BM area, and it is not controlled 显示区往外 1/2BM 区域以外, 不管控.		MI
	Point defects Embossing	Under 6 inches 6 寸以下	1.D $\leq$ 0.15mm, Ignore (忽略) . 2.0.15mm < D $\leq$ 0.30mm; N $\leq$ 2; DS $\geq$ 10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D $\leq$ 0.20mm, Ignore (忽略) . 2.0.20mm < D $\leq$ 0.40mm; N $\leq$ 3; DS $\geq$ 10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D $\leq$ 0.25mm, Ignore (忽略) . 2.0.25mm < D $\leq$ 0.50mm; N $\leq$ 4; DS $\geq$ 10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	Dirty 脏污	Full size 全尺寸	Dirt, finger prints, etc. are not allowed 不允许有脏污、手指印等.		MI
	Warping 起翘	Full size 全尺寸	Not allowed 不允许.		MI
	Paste offset 贴附偏位	Full size 全尺寸	It is not allowed to exceed the patch tolerance required by the drawing; After TP lamination, it is not allowed to leak the edges of the polarizer 不允许超出图纸要求的贴片公差; 在 TP 贴合后不允许漏偏光片边缘.		MI
	Angle mistake 角度错误	Full size 全尺寸	Not allowed 不允许.	MA	
	Mixture 混料	Full size 全尺寸	Not allowed 不允许.	MA	

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
TP	Scratches 划伤	Under 6 inches 6 寸以下	1.W≤0.05mm; L≤5mm, Ignore (忽略) . 2.0.05mm < W≤0.10mm ; L≤5mm ; N≤2 ; DS≥10mm. 3.0.10mm < W; 5mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
		6~10.0 inches 6 寸~10.0 寸	1.W≤0.07mm; L≤5mm, Ignore (忽略) . 2.0.07mm < W≤0.12mm ; L≤10mm ; N≤3 ; DS≥10mm. 3.0.12mm < W; 10mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
		More than 10 inches 10 寸以上	1.W≤0.10mm; L≤5mm, Ignore (忽略) . 2.0.10mm < W≤0.15mm ; L≤10mm ; N≤4 ; DS≥10mm. 3.0.15mm < W; 10mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
	Black dots white dots 黑点/白点	Under 6 inches 6 寸以下	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤2; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤3; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.25mm, Ignore (忽略) . 2.0.25mm < D≤0.50mm; N≤4; DS≥10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	OCA Bubbles 气泡	Full size 全尺寸	Not allowed 不允许.		MI
	Corners broken 崩边/崩角	Full size 全尺寸	1.Product front /产品正面: Edge and corner chipping is not allowed / 崩角、崩边不允许 2.Product back /产品背面: X≤0.5 , Y≤0.5, Z≤1/2T; N≤4; DS≥10mm.	MA	
	Silk screen 丝印	Full size 全尺寸	The silk screen is clear, complete and correct 丝印清晰、完整、内容正确.		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
TP	Dirty 脏污	Full size 全尺寸	Uncleanable dirt, Not allowable. 不可擦拭的脏污, 不允许.		MI
	Broken 破损	Full size 全尺寸	Not allowable. 不允许.		MI
	Ink color aberration 油墨色差	Full size 全尺寸	$\Delta E > 1$, Not allowable (不允许) .		MI
	Cover pinholes 针孔	Full size 全尺寸	1.D $\leq$ 0.20mm, N $\leq$ 2, DS $\geq$ 10mm, allowable 2.D > 0.20mm, intensive pinholes (密集型针孔) , Not allowable (不允许) .		MI
	Paint off 掉漆	Full size 全尺寸	Touch-up on the back of the cover is allowed, and the touch-up area cannot exceed 2.0mm in diameter / 允许在盖板背面补漆, 补漆面积不 能超过直径 2.0mm.		MI
BL 背光	Backlight separation 背光分离	Full size 全尺寸	Not allowable 不允许.		MI
	Deformed 变形	Full size 全尺寸	Measured using a plug gauge, If the deformation exceeds 0.3mm, NG is judged 使用塞规测量, 形变超过 0.3mm, 判定 NG.		MI
	Iron frame Oxidation /abscission 铁框氧化/脱落	Full size 全尺寸	Not allowable 不允许.		MI
	Dirt/adhesive residue/solder beads 脏污/残胶/锡珠	Full size 全尺寸	Not allowable 不允许.		MI
	Inkjet/barcode/ QR code 喷码/条码/二维 码	Full size 全尺寸	The inkjet code is clear and complete, the barcode and QR code can be scanned normally, and the content and format meet the requirement / 喷码清晰完整、条码和二维码 可正常扫描, 内容和格式与要求相符.		MI
	Auxiliary materials 辅料	Full size 全尺寸	Accessories (vinyl, double-sided tape, insulating glue, etc.) are not allowed to be missed, misguided, defective, etc 辅料 (黑胶、双面胶、绝缘胶等) 不允许有漏贴、 贴偏、残缺等.		MI

4.3、Functional inspection standards:

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
Display Screen 模组	Light leakage / Mura 漏光/ Mura	Full size 全尺寸	1.Use ND5% filter masking, visual invisibility is OK 使用 ND5%遮盖, 目视不可见即为 OK. 2.If necessary, sign off on the sample 必要时, 签限定样.		MI
	Brightness uniformity 亮度均匀性	Full size 全尺寸	Brightness uniformity < 85.0%, Not allowable 亮度均匀性 < 85.0%, 不允许.	MA	
	LCD bright spots/dark spots 玻璃亮点/暗点	Under 6 inches 6 寸以下	1.D≤0.10mm, Ignore (忽略) . 2.0.10mm < D≤0.20mm; N≤2; DS≥10mm. 3.D > 0.20mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤3; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤4; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
	Backlight black dots/white dots 背光黑点/白点	Under 6 inches 6 寸以下	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤2; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤3; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.25mm, Ignore (忽略) . 2.0.25mm < D≤0.50mm; N≤4; DS≥10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	Linear foreign bodies 线状异物	Under 6 inches 6 寸以下	1.W≤0.05mm; L≤5mm, Ignore (忽略) . 2.0.05mm < W≤0.10mm ; L≤5mm ; N≤2; DS≥10mm. 3.0.10mm < W; 5mm < L, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.W≤0.07mm; L≤5mm, Ignore (忽略) . 2.0.07mm < W≤0.12mm ; L≤10mm ; N≤3 ; DS≥10mm. 3.0.12mm < W; 10mm < L, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.W≤0.10mm; L≤5mm, Ignore (忽略) . 2.0.10mm < W≤0.15mm ; L≤10mm ; N≤4 ; DS≥10mm. 3.0.15mm < W; 10mm < L, Not allowable (不允许) .		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
Display Screen 模组	White/Black print 白印/黑印	Full size 全尺寸	Use ND5% filter masking, visual invisibility is OK 使用 ND5%遮盖，目视不可见即为 OK.		MI
	Interference pattern/Newtonian pattern 干涉纹/牛顿纹	Full size 全尺寸	Not allowable 不允许.		MI
	Membranes displacement 膜材移位	Full size 全尺寸	Not allowable 不允许.		MI
	Color blocks 色斑	Full size 全尺寸	Use ND5% filter masking, visual invisibility is OK /使用 ND5%遮盖，目视不可见即为 OK.		MI
	Display abnormal 画异	Full size 全尺寸	Not allowable 不允许.	MA	
	No display 无显示	Full size 全尺寸	Not allowable 不允许.	MA	
	Line/Missing Drawing 线条/缺画	Full size 全尺寸	Not allowable 不允许.	MA	
	Splash screen 闪屏	Full size 全尺寸	Not allowable 不允许.	MA	
	LCD grid LCD 网格	Full size 全尺寸	Not allowable 不允许.	MA	
	Afterimage 残影	Full size 全尺寸	Not allowable 不允许.	MA	
	Wrong viewing angle 可视角错误	Full size 全尺寸	Not allowable 不允许.	MA	
TP	No touch 无触摸	Full size 全尺寸	Not allowable 不允许.	MA	
	Touch the jump point 触摸跳点	Full size 全尺寸	Not allowable 不允许.	MA	
	Touch not sensitive 触摸不灵敏	Full size 全尺寸	Not allowable 不允许.	MA	