

Shenzhen Leadtek Electronics Co.,Ltd

PRODUCT SPECIFICATION

TFT-LCD HDMI MODULE

Module No: LTK126FTXLM10-V0

☒ Preliminary Specification

☐ Approval Specification

Designed by	Checked by	Approved by
		

Final Approval by Customer

Approved by	Comment

※The specification of "TBD" should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.



1.Document Revision History

Version	Contents	Date	Note
V0	Initial version	2025.11.24	





2.General Description

NO	Item	Specification	Unit
1	LCD Size	TFT"12.6	inch
2	Panel Type	IPS	-
3	Display Resolution	2560xRGBx666	pixel
4	Display Mode	Normally Black	-
5	Number of Colors	16.7M	-
6	Viewing Direction	ALL	-
7	LCM Module Outline	315.61 (H) x94.02(V) x3.0(T)	mm
8	Active Area	304.9 (H) x79.32(V)	mm
9	Pixel Pitch	0.1191x0.1190	mm
10	Weight	-	g
11	TDDIC	-	-
12	Light Source	White LED	-
13	LCM Interface	MIPI	-

Note : Please refer to the mechanical drawing;

3. Mechanical Drawing



4.0 Electrical Specifications

4.1. Absolute Maximum Ratings

Items	Symbol	Values		Unit	Condition
		Min.	Max.		
Storage Temperature	T_{ST}	-25	+70	°C	
Operating Temperature	T_{OP}	-20	+60	°C	

Note 1: Functional operation should be restricted under ambient temperature 25°C.
Maximum ratings are those values beyond which damages to the device may occur.
Functional operation should be restricted to the limits in the Electrical Characteristics.

4.2 DC Electrical Characteristics

The following items are measured under stable condition and suggested application circuit.

a.LCD Power Specification


Parameter		Symbol	Min	Typ.	Max.	Unit	Notes
Power Supply Voltage		V_{LCD}	(3.25)	3.3	(3.5)	V	
Power Supply Current	Mosaic	I_{LCD}	-	0.61	(0.65)	A	1
	White	I_{LCD}	-	0.801	(1.135)		

<Note>

- The specified current and power consumption are under the $V_{LCD}=3.25V$, $T_a=25\pm2^\circ C$, $f_v=60Hz$ condition.
- $PLCD(Typ) = I_{LCD}(Typ) * V_{LCD}(Typ)$, $PLCD(Max) = I_{LCD}(Max) * V_{LCD}(Typ)$
- Test condition is the V_{LCD} voltage range between 3.25V~3.5V on the rising time 0.5ms, please see below picture.
($V_{LCD}=3.3V$, $T_a=25\pm2^\circ C$, $f_v=60Hz$)
- The recommended operating conditions show the range in which the device can operate normally.
- LED_PWM, TOUCH_EN, MUTE, HVR, LCD_Test, SCL_Touch, SDA_Touch, RESET
- Interrupt, SDA_Touch

*VISH: Input Single-Ended High Threshold Voltage / VISL: Input Single-Ended Low Threshold Voltage


*VROSH: Reverse Output Single-Ended High Voltage / VROSL: Reverse Output Single-Ended Low Voltage



[Mosaic 8x6]



[White]



0.5ms

5.0 Interface pin define

LCM Interface PIN Define:

Pin No.	Symbol	Description	Remark
1	GND	Power Ground	
2	TP_INT	No connect	
3	TP_SDA	No connect	
4	TP_SCL	No connect	
5	TP_RESET	No connect	
6	GND	Power Ground	
7	NC	No connect	
8	GND	Power Ground	
9	MIPI_D0_N	MIPI_DP0- are differential data signal line	
10	MIPI_D0_P	MIPI_DP0+ are differential data signal line	
11	GND	Power Ground	
12	MIPI_D1_N	MIPI_DP1- are differential data signal line	
13	MIPI_D1_P	MIPI_DP1+ are differential data signal line	
14	GND	Power Ground	
15	MIPI_D2_N	MIPI_DP2- are differential data signal line	
16	MIPI_D2_P	MIPI_DP2+ are differential data signal line	
17	GND	Power Ground	
18	MIPI_DCLK_N	CLOCK Lane engative-end input pin	
19	MIPI_DCLK_P	CLOCK Lane positive-end input pin	
20	GND	Power Ground	
21	MIPI_D3_N	MIPI_DP3- are differential data signal line	
22	MIPI_D3_P	MIPI_DP3+ are differential data signal line	
23	GND	Power Ground	
24	NC	No connect	
25	NC	No connect	
26	GND	Power Ground	
27	NC	No connect	
28	NC	No connect	

29	GND	Power Ground	
30	NC	No connect	
31	NC	No connect	
32	GND	Power Ground	
33	NC	No connect	
34	NC	No connect	
35	GND	Power ground	
36	NC	No connect	
37	NC	No connect	
38	GND	Power ground	
39	VDD	Power supply , 3.3V	
40	VDD	Power supply , 3.3V	
41	GND	Power ground	
42	NC	No connect	
43	NC	No connect	
44	RESET	Reset signal (Low: Active1.8V).	
45	NC	No connect	
46	NC	No connect	
47	LED_K	LED backlight cathode	
48	LED_K	LED backlight cathode	
49	LED_A	LED backlight anode.	
50	LED_A	LED backlight anode.	

6. Backlight Characteristics


Ta = 25℃

PARAMETER	Sym.	Min.	Typ.	Max.	Unit	Test Condition	Note
LED Current	IF	—	120	—	mA	—	—
LED Voltage	VF	—	24.8	-	V	I=120mA	—
Life Time		—	20000	—	Hr.	I ≤ 120mA	—
LCM Brightness	Luminance	—	350	--	cd/m2	I=120mA	
Color	White						

Note:

(1) The “LED life time” is defined as the module brightness decrease to 50% of original brightness at IL=20mA/LED. The LED life time could be decreased if operating IL is larger than 20mA/LED.

Backlight circuit diagram shown in below:

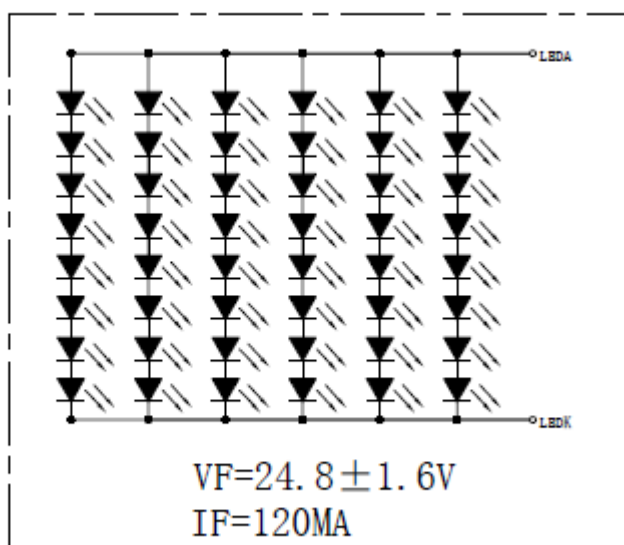

7.OPTICAL SPECIFICATION


Ambient condition : 25 ±2°C , 60 ±10% RH , under 10 Lux in the darkroom.

(Transmittance, contrast ratio, response time, viewing angle results are using MDT LC + Zero tac Polarizer + Corresponding Backlight, reference only)

The backlight should be operating for 30 minutes before measurement.

ITEM		SYMBOL		CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK	
Transmittance (w/ HC&HC + KSF)		T _{PL}		$\theta = \phi = 0^{\circ}$	3.8	4.5	---	%	Note 1	
Contrast Ratio		CR			1000	1500	---	--	Note 2	
Response Time		Tr+Tf		$\theta = \phi = 0^{\circ}$	---	25	30	ms	Note 3	
Viewing Angle	Vertical	U	---	CR ≥ 10	80	85	---	degree	Note 4	
		D	---		80	85	---	degree		
	Horizontal	L	---		80	85	---	degree		
		R	---		80	85	---	degree		
		Color Filter Chromaticity (CIE 1931)	W		x		$\theta = \phi = 0^{\circ}$	(0.268)		(0.288)
y				(0.303)	(0.323)	(0.343)		--		
R	x		(0.611)	(0.631)	(0.651)	--				
	y		(0.298)	(0.318)	(0.338)	--				
G	x		(0.235)	(0.255)	(0.275)	--				
	y		(0.525)	(0.545)	(0.565)	--				
B	x		(0.121)	(0.141)	(0.161)	--				
	y		(0.117)	(0.137)	(0.157)	--				
NTSC					68.3	51.7		56.7	---	
Flicker					---	---		-30	dB	Note 6
Crosstalk					---	---	3.0	%		


Note 1. Measure device : [TOPCON_SRUL2 °]

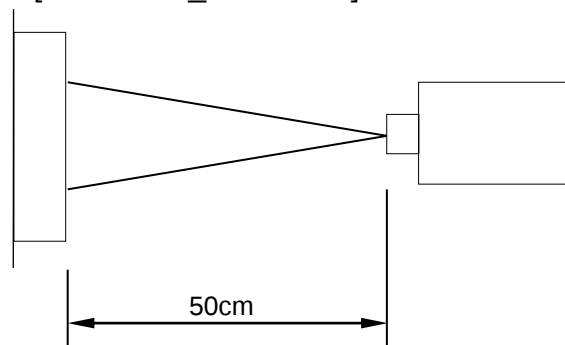


Note 2. Definition of Contrast Ratio :

$$CR = \text{White Luminance (ON)} / \text{Black Luminance (OFF)}$$

Note 3. Definition of response time : The response time is defined as the time interval between the 10% and 90% amplitudes.

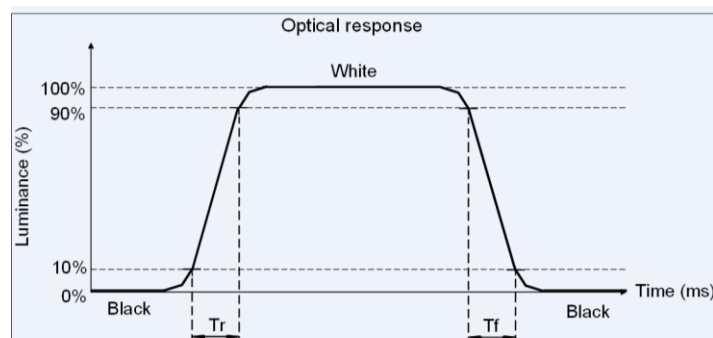

Note 4. Definition of view angle(θ , ϕ) :

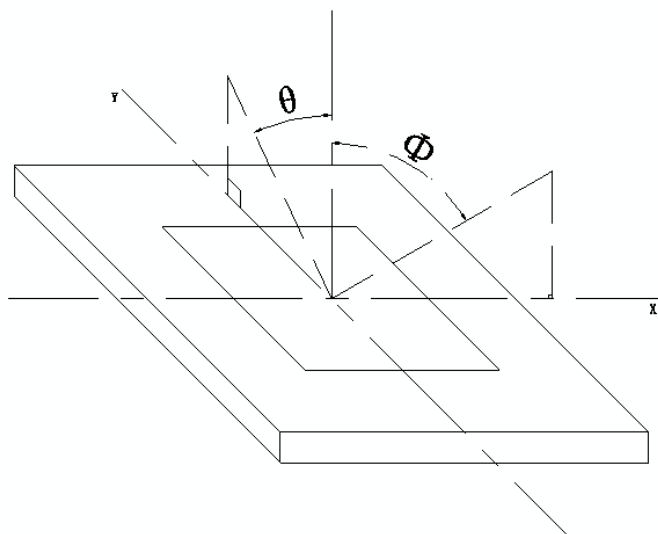


Note 5. (a) CF Glass light source: C light.

(b) Chromaticity & NTSC spec is for reference. (Different polarizer & backlight will both affect the MODULE chromaticity.)


Note 6. Base on FT8201P under column inversion and apply OTP process with below pattern.[Measure device: TOPCON_SRUL2]



Flicker




1/2 crosstalk




1/3 crosstalk

8. Product appearance diagram

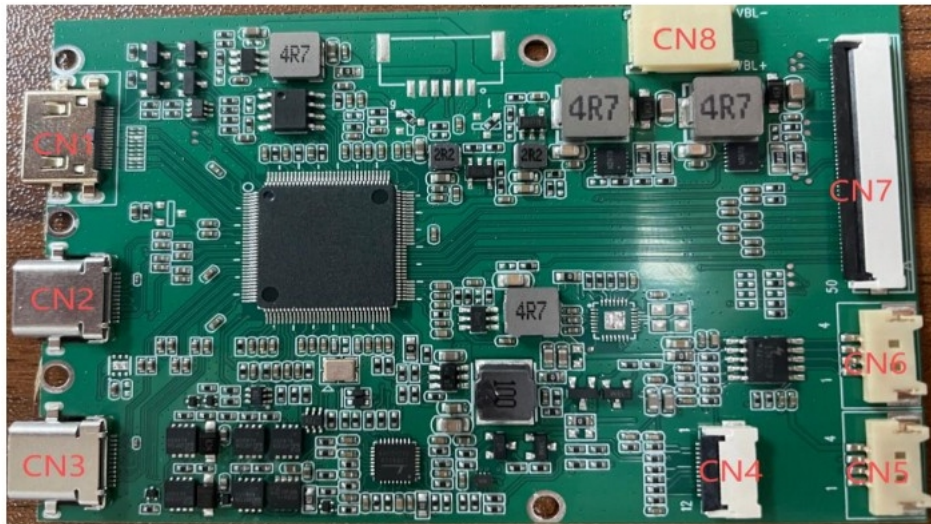

9. Product structure and dimensions

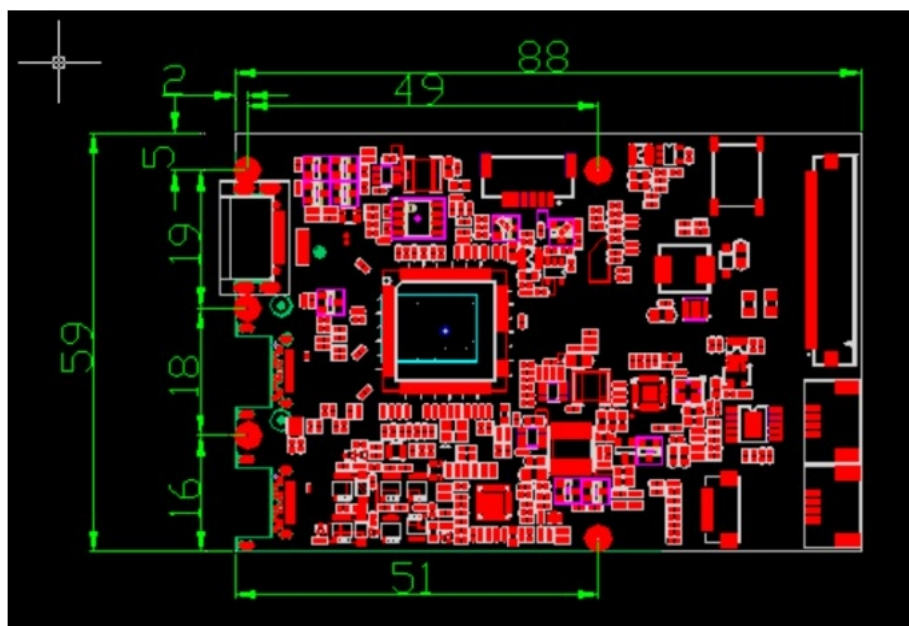

10. CN6 (1.25mm X 4 Horizontal Socket): Speaker Output Interface

Number	Definition	Description
1	RN	Right channel negative electrode
2	RP	Right channel positive electrode
3	LP	Left channel positive electrode
4	LN	Left channel negative electrode

11. CN5 (1.25mm X 4mm Horizontal Base): USB Touch

Number	Definition	Description
1	GND	GND
2	DP	USB2.0 signal
3	DM	USB2.0 signal
4	USB 5V	USB 5V

12. Definition and description of FPC seats

CN8 (Backlit high-voltage socket)

Number	Definition	Description
1	LED_K	Backlit cathode
2	LED_A	Backlit anode

13. CN4 (FPC20 0.5MM horizontal socket):

Button output interface (configurable, subject to physical implementation)

Number	Definition	Description
1	GND	GND
2	R	Headphone signal
3	L	Headphone signal
4	HP-IN	Earphone detection signal
5	GND	GND
6	MENU	Menu key
7	LEFT/UP	Up arrow key
8	RIGHT/D	Down arrow key
9	LED1+	LED status indicator (Green)
10	LED2+	LED status indicator (Red)
11	GND	GND
12	BACK	Switch key/Return key

14. Interface Definition

CN2 CN3 Power type-c power supply port

NO.	SYMBOL	DESCRIPTION
1	GND	Power Ground
2	VBUS	Positive terminal of the power supply
3	SBU2	Communication channel, used to determine the type and direction of connected devices
4	CC1	Configuration Channel
5	DN2	Differential data transmission pair
6	DP1	Differential data transmission pair
7	DN1	Differential data transmission pair
8	DP2	Differential data transmission pair
9	SBU1	Communication channel, used to determine the type and direction of connected devices
10	CC2	Configuration Channel
11	VBUS	Positive terminal of the power supply
12	GND	Power Ground

15. CN1.HDMI interface

NO.	SYMBOL	DESCRIPTION
1	TMDS Data2+	TDATA2+ Transmit the red component (differential pair)
2	TMDS Data2 SH	Transmit the red component (differential pair - shield)
3	TMDS Data2-	DATA2- Transmit the red component (differential pair)
4	TMDS Data1+	DATA1+ Transmit the green component (differential pair)
5	TMDS Data1 SH	Transmit the green component (differential pair + shield)
6	TMDS Data1-	DATA1- Transmit the green component (differential pair)
7	TMDS Data0+	DATA0+ Transmit the green component (differential pair)
8	TMDS Data0 S	Transmit the blue component and synchronization signal (differential pair + shielding)
9	TMDS Data0-	DATA0- Transmit the green component (differential pair)
10	TMDS Clock+	Clock signal (differential positive)
11	TMDS Clock SH	TMDS Clock Shield
12	TMDS Clock-	Clock signal (differential negative)
13	CEC	Consumer electronics control (device linkage)
14	NC	No connection
15	SCL	clock line
16	SDA	SDA signal
17	DDC/CEC GND	Power Ground
18	+5V	POWER_5V
19	Hot Plug Detec	Hot-swappable detection (checking the connection status of the display)

16. Reliability test items

No.	Test Item	Test Condition	Notes
1	High Temp. Storage	+70°C / 48H	1.TFT-LCD Panel should be at room temperature for 4 hours when the display quality test is over. There should be no particular change which might affect the practical display function and the display quality test should be conducted under normal operating condition.
2	Low Temp. Storage	-25°C / 48H	
3	High Tempe. Operating	+60°C / 48H	
4	Low Tempe. Operating	-20°C / 48H	
5	High Temperature / Humidity storage	Ta= 60 °C , 90% RH	
6	Thermal Shock Test	Static state, -10°C (30min) ~50°C (30min), 20 cycles	2.Functional test is OK. Missing Segment, short, unclear segment non-display, display abnormally and liquid crystal leakage are not allowed. sample shall be free from defects:

Note: All tests above are practiced at module type.

There is no display function NG issue occurred, All the cosmetic specification is judged before the reliability stress.

17.0 General Precaution

17.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

17.2 Assembly Precaution

- 1、 Please use the mounting hole on the module side in installing and do not bending or wrenching LCD in assembling. And please do not drop, bend or twist LCD module in handling.
 - 2、 Please design display housing in accordance with the following guide lines.
 - 3、 Housing case must be destined carefully so as not to put stresses on LCD all sides and not to wrench module. The stresses may cause non-uniformity even if there is no non-uniformity statically.
 - 4、 Keep sufficient clearance between LCD module back surface and housing when the LCD module is mounted. The clearance in the design is recommended taking into account the tolerance of LCD module thickness and mounting structure height on the housing.
 - 5、 Please do not push or scratch LCD panel surface with any-thing hard. And do not soil LCD panel surface by touching with bare hands. (Polarizer film, surface of LCD panel is easy to be flawed.)
 - 6、 Please do not press any parts on the rear side such as source IC, gate IC, and FPC during handling LCD module. If pressing rear part is unavoidable, handle the LCD module with care not to damage them.
 - 7、 Please wipe out LCD panel surface with absorbent cotton or soft cloth in case of it being soiled.
 - 8、 Please wipe out drops of adhesives like saliva and water on LCD panel surface immediately. They might damage to cause panel surface variation and color change.
- 11.2.7 Please do not take a LCD module to pieces and reconstruct it. Resolving and reconstructing modules may cause them not to work well.

17.3 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. Leadtek does not warrant the module, if customers disassemble or modify the module.

17.4 Breakage of LCD Panel

- 1、 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 2、 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 3、 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 4、 Handle carefully with chips of glass that may cause injury, when the glass is broken.

17.5 Absolute Maximum Ratings and Power Protection Circuit

- 1、 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 2、 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 3、 It's recommended employing protection circuit for power supply.

11.6 Operation

- 1 、 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 2、 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 3 、 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 4 、 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

17.6 Static Electricity

- 1 、 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.
- 2、 Because LCD module uses CMOS-IC on TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.
- 3 、 Persons who handle the module should be grounded through adequate methods.

17.7 Disposal

When disposing LCD module, obey the local environmental regulations.

17.8 OTHERS

- 1 、 A strong incident light into LCD panel might cause display characteristics' changing inferior because of polarizer film, color filter, and other materials becoming inferior. Please do not expose LCD module direct sunlight land strong UV rays.
- 2、 Please pay attention to a panel side of LCD module not to contact with other materials in preserving it alone.
- 3、 For the packaging box, please pay attention to the followings:
- 4、 Packaging box and inner case for LCD are designed to protect the LCDs from the damage or scratching during transportation. Please do not open except picking LCDs up from the box.
- 5、 Please handle packaging box with care not to give them sudden shock and vibrations. And also please do not throw them up.
- 6、 Packing box and inner case for LCDs are made of cardboard. So please pay attention not to get them wet. (Such like keeping them in high humidity or wet place can occur getting them wet.)

18. Packing form-TBD



深圳市丽台电子有限公司

Shenzhen Leadtek Electronics Co.,Ltd

Incoming Inspection Standard

品质允收标准

Model N0. /产品型号: Applicable to Leadtek Touch Display ScreenUpdated Date /生效日期: 2025.04.01Version / 版本号: V0

Record of Revision /修订履历.

Version /版本号	Revision Record /修订内容	Reviser /修订人	Revision Date /修订日期
V0	首发 / Initial release	Green	2025.04.01



1、Scope of application /适用范围.

适用于丽台电子触摸显示屏/ Applicable to Leadtek Touch Display Screen.

2、Inspection conditions and environment / 检验条件与环境.

2.1、Inspection Conditions / 检验条件:

2.1.1、Inspection Distance / 检测距离: 35cm $\pm$ 5cm.

2.1.2、Inspection time /检验时间: Displays performance test /功能测试: 2~3S /Image,


Appearance Inspection / 外观检验: 8~10S.

2.1.3、Inspection the viewing angle /检验视角:

Display Inspection Angle /显示检验角度: $\pm 45^\circ$.

Appearance Inspection Angle /外观检验角度: $\pm 45^\circ$.

Eye position /眼睛位置:

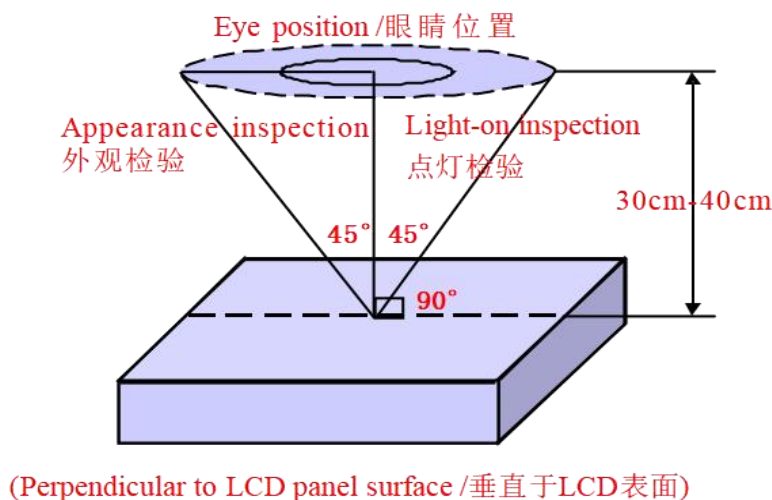

2.2、Inspection environment /检验环境:

Temperature / 温度		25 $\pm$ 5 $^\circ$ C
Humidity / 湿度		55 $\pm$ 5%RH
Brightness 亮度	Appearance Inspection / 外观检验	800~1000 Lux
	Display Inspection / 功能检验	200~300 Lux

2.3、Sampling conditions / 抽样方式.

Sampling Plan /抽样计划		GB/T 2828.1- 2003
		Batch single sampling/批量单次抽样
		General inspection level: II/一般检验水平: 二级
AQL	Major Defect /主要缺陷	0.25
	Minor Defect /次要缺陷	0.65

3、Terms and definitions /术语和定义.

3.1、Defect classification / 缺陷分类:

3.1.1、Major defects /主要缺陷: Defects that cause the product to fail or reduce the usability of the product / 引起产品功能失效和减少产品的有效使用与操作的缺陷.

3.1.2、Minor defects / 次要缺陷: Defects that do not affect the functionality and effective use and operation of the product / 不影响产品功能和有效使用与操作的缺陷.


3.2、Point defects / 点状缺陷:

The size of a punctate defect is defined by the diameter D, and the average diameter of the defect is $D=1/2(W+L)$ / 点状缺陷由直径 D 定义大小, 缺陷的平均直径 $D=1/2(W+L)$.

3.3、line defects / 线状缺陷:

When defect size $L \geq 2W$, the defect count as liner type defect. Size of linear defect is defined by length (L) and the maximum width (W)

当缺陷尺寸 $L \geq 2W$ 时, 被视为线状缺陷, 线状缺陷是由长度 (L) 和最大宽度 (W) 定义的.

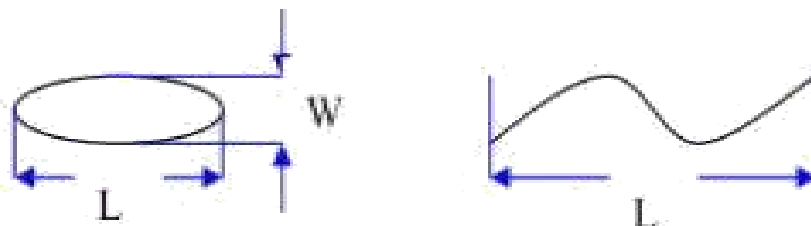

3.4、LCD sub-pixels / LCD 子像素点:


The sub-pixel defect area is greater than 50% of the LCD sub-pixel area, and is visible through ND5% masking

子像素点缺陷面积大于 50% LCD 子像素面积, 且透过 ND5%遮盖是可见的.

3.5、ND card test method / ND 卡检验方法:

Hold the ND card about 5cm above the display area, with your eyes 30-40cm away from the panel, and observe for 2~3 seconds

在显示区域上方大约 5cm 处握住 ND 卡, 眼睛距离面板 30-40cm, 观察 2~3 秒.

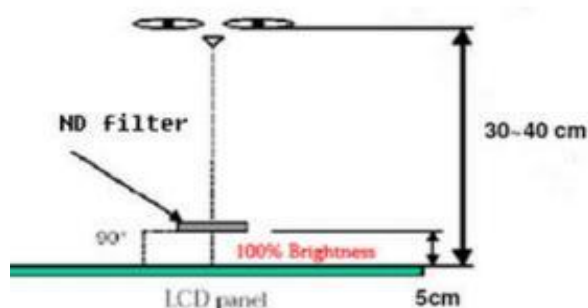

3.6、Surface substances that can be cleaned are not considered defects (e.g. finger prints on the protective film, dust particles)

可以被清洁干净的表面物质不视为缺陷 (如保护膜上的手指印, 尘粒) .

3.7、Defects that can be covered by the material and are not visible to the eye, and do not affect the function and use are not considered defects

能被物料覆盖目视不可见, 且不影响功能与使用的缺陷不视为缺陷.

3.8、AA shows that damage to the glass outside the area does not affect the effective line and does not expand the loss is acceptable

AA 显示区域以外的玻璃损伤, 不影响有效线路和不会在扩大损失的是可以接受的.

3.9、Issues not specified or defined in this document shall be dealt with through friendly negotiation between the parties / 本文件中未规定或定义的问题, 双方友好协商处理.

4.0、Inspection standards /检验标准:

4.1、Structural size standards / 结构尺寸标准:

Measurement items /测量项目		Specification /规格	Remark /备注
Name/名称	Unit /单位	Tolerance /公差	
Outside dimension: Length 尺寸: 长	mm /毫米	0.10mm~0.3mm	Please refer to the product specification for detailed dimensions and tolerances 详细的尺寸规格和公差请参考产品规格书
Outside dimension: Width 尺寸: 宽	mm /毫米	0.10mm~0.3mm	
Outside dimension: Thickness 尺寸: 厚	mm /毫米	0.20mm~0.50mm	

4.2、Appearance Inspection standards:

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
LCD	ITO	Full size 全尺寸	ITO can't open circuit, short circuit, ITO notch cannot exceed 70% of width. ITO 不能有开路 and 短路, ITO 缺口不能超过宽度的 70%.	MA	
	Corners broken 崩边/崩角	Full size 全尺寸	1、It cannot affect the appearance of valid routes and functions; 不能影响有效线路和功能外观.	MA	
			2、There must be no extensible rips 不能有可延伸性裂纹.	MA	
Silicone 硅胶	Silicone coating 硅胶涂布	Full size 全尺寸	1、The height cannot exceed the LCD CF surface / 高度不能超过 LCD CF 面.		MI
			2、No overflow and lack of glue / 不能溢胶和缺胶.		MI
			3、Silicone cannot cover POL and FPC/ 硅胶不能覆盖到 POL 和 FPC.		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
PCBA FPC Connector 连接器	Appearance 表面外观	Full size 全尺寸	1.FPC is not allowed to have drape/bubble/fold / 不允许有披锋/气泡/褶皱.		MI
			2.Surface scratches do not allow copper leakage / 表面划伤不允许出现漏铜.	MA	
			3.Cracking is not allowed / 不允许破裂.	MA	
			4.Gold finger oxidation is not allowed 不允许金手指氧化.	MA	
			5.Chromatic aberration is not allowed 不允许出现色差.	MA	
	Components 元器件	Full size 全尺寸	1. Damage, missing parts, and incorrect models are not allowed 不允许损伤、缺件、型号错误.	MA	
			2.Components need to be insulated with high temperature adhesive (unless not required by the drawings) / 元器件需要有高温胶绝缘保护 (除非图纸无要求) .		MI
	Weld 焊接	Full size 全尺寸	1. False soldering, virtual soldering, and tinning are not allowed 不允许假焊、虚焊、连锡.	MA	
			2. No solder bead residue is allowed 不允许有锡珠残留.		MI
			3.The pads need to be glued with high temperature (unless not required by the drawings) / 焊盘需贴高温胶 (除非图纸无要求) .		MI
POL 偏光片	Scratches 划伤	Under 6 inches 6 寸以下	1. $W \leq 0.05\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.05\text{mm} < W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$; $N \leq 2$; $DS \geq 10\text{mm}$. 3. $0.10\text{mm} < W$; $5\text{mm} < L$, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1. $W \leq 0.07\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.07\text{mm} < W \leq 0.12\text{mm}$; $L \leq 10\text{mm}$; $N \leq 3$; $DS \geq 10\text{mm}$. 3. $0.12\text{mm} < W$; $10\text{mm} < L$, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1. $W \leq 0.10\text{mm}$; $L \leq 5\text{mm}$, Ignore (忽略) . 2. $0.10\text{mm} < W \leq 0.15\text{mm}$; $L \leq 10\text{mm}$; $N \leq 4$; $DS \geq 10\text{mm}$. 3. $0.15\text{mm} < W$; $10\text{mm} < L$, Not allowable (不允许) .		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
POL 偏光片	Bubbles	Under 6 inches 6 寸以下	1.D $\leq$ 0.15mm, Ignore (忽略) . 2.0.15mm < D $\leq$ 0.30mm; N $\leq$ 2; DS $\geq$ 10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		More than 6 inches 6 寸以上	1.D $\leq$ 0.20mm, Ignore (忽略) . 2.0.20mm < D $\leq$ 0.40mm; N $\leq$ 3; DS $\geq$ 10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
	Bubbles around the edges 边缘气泡	Full size 全尺寸	1.Within 1/2BM of the display area, it is not allowed 显示区往外 1/2BM 区域内, 不允许. 2.The display area is 1/2 outside the BM area, and it is not controlled 显示区往外 1/2BM 区域以外, 不管控.		MI
	Point defects Embossing	Under 6 inches 6 寸以下	1.D $\leq$ 0.15mm, Ignore (忽略) . 2.0.15mm < D $\leq$ 0.30mm; N $\leq$ 2; DS $\geq$ 10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D $\leq$ 0.20mm, Ignore (忽略) . 2.0.20mm < D $\leq$ 0.40mm; N $\leq$ 3; DS $\geq$ 10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D $\leq$ 0.25mm, Ignore (忽略) . 2.0.25mm < D $\leq$ 0.50mm; N $\leq$ 4; DS $\geq$ 10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	Dirty 脏污	Full size 全尺寸	Dirt, finger prints, etc. are not allowed 不允许有脏污、手指印等.		MI
	Warping 起翘	Full size 全尺寸	Not allowed 不允许.		MI
	Paste offset 贴附偏位	Full size 全尺寸	It is not allowed to exceed the patch tolerance required by the drawing; After TP lamination, it is not allowed to leak the edges of the polarizer 不允许超出图纸要求的贴片公差; 在 TP 贴合后不允许漏偏光片边缘.		MI
	Angle mistake 角度错误	Full size 全尺寸	Not allowed 不允许.	MA	
	Mixture 混料	Full size 全尺寸	Not allowed 不允许.	MA	

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
TP	Scratches 划伤	Under 6 inches 6 寸以下	1.W≤0.05mm; L≤5mm, Ignore (忽略) . 2.0.05mm < W≤0.10mm ; L≤5mm ; N≤2 ; DS≥10mm. 3.0.10mm < W; 5mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
		6~10.0 inches 6 寸~10.0 寸	1.W≤0.07mm; L≤5mm, Ignore (忽略) . 2.0.07mm < W≤0.12mm ; L≤10mm ; N≤3 ; DS≥10mm. 3.0.12mm < W; 10mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
		More than 10 inches 10 寸以上	1.W≤0.10mm; L≤5mm, Ignore (忽略) . 2.0.10mm < W≤0.15mm ; L≤10mm ; N≤4 ; DS≥10mm. 3.0.15mm < W; 10mm < L, Not allowable (不允许) . 4.There is a feeling scratch, Not allowable 有感划伤, 不允许.		MI
	Black dots white dots 黑点/白点	Under 6 inches 6 寸以下	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤2; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤3; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.25mm, Ignore (忽略) . 2.0.25mm < D≤0.50mm; N≤4; DS≥10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	OCA Bubbles 气泡	Full size 全尺寸	Not allowed 不允许.		MI
	Corners broken 崩边/崩角	Full size 全尺寸	1.Product front /产品正面: Edge and corner chipping is not allowed / 崩角、崩边不允许 2.Product back /产品背面: X≤ 0.5 , Y≤0.5, Z≤1/2T; N≤4; DS≥10mm.	MA	
	Silk screen 丝印	Full size 全尺寸	The silk screen is clear, complete and correct 丝印清晰、完整、内容正确.		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
TP	Dirty 脏污	Full size 全尺寸	Uncleanable dirt, Not allowable. 不可擦拭的脏污, 不允许.		MI
	Broken 破损	Full size 全尺寸	Not allowable. 不允许.		MI
	Ink color aberration 油墨色差	Full size 全尺寸	$\Delta E > 1$, Not allowable (不允许) .		MI
	Cover pinholes 针孔	Full size 全尺寸	1.D $\leq$ 0.20mm, N $\leq$ 2, DS $\geq$ 10mm, allowable 2.D > 0.20mm, intensive pinholes (密集型针孔) , Not allowable (不允许) .		MI
	Paint off 掉漆	Full size 全尺寸	Touch-up on the back of the cover is allowed, and the touch-up area cannot exceed 2.0mm in diameter / 允许在盖板背面补漆, 补漆面积不 能超过直径 2.0mm.		MI
BL 背光	Backlight separation 背光分离	Full size 全尺寸	Not allowable 不允许.		MI
	Deformed 变形	Full size 全尺寸	Measured using a plug gauge, If the deformation exceeds 0.3mm, NG is judged 使用塞规测量, 形变超过 0.3mm, 判定 NG.		MI
	Iron frame Oxidation /abscission 铁框氧化/脱落	Full size 全尺寸	Not allowable 不允许.		MI
	Dirt/adhesive residue/solder beads 脏污/残胶/锡珠	Full size 全尺寸	Not allowable 不允许.		MI
	Inkjet/barcode/ QR code 喷码/条码/二维 码	Full size 全尺寸	The inkjet code is clear and complete, the barcode and QR code can be scanned normally, and the content and format meet the requirement / 喷码清晰完整、条码和二维码 可正常扫描, 内容和格式与要求相符.		MI
	Auxiliary materials 辅料	Full size 全尺寸	Accessories (vinyl, double-sided tape, insulating glue, etc.) are not allowed to be missed, misguided, defective, etc 辅料 (黑胶、双面胶、绝缘胶等) 不允许有漏贴、 贴偏、残缺等.		MI

4.3、Functional inspection standards:

(D : diameter, W : width, L : length, N : quantity, DS : spacing)

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
Display Screen 模组	Light leakage / Mura 漏光/ Mura	Full size 全尺寸	1.Use ND5% filter masking, visual invisibility is OK 使用 ND5%遮盖, 目视不可见即为 OK. 2.If necessary, sign off on the sample 必要时, 签限定样.		MI
	Brightness uniformity 亮度均匀性	Full size 全尺寸	Brightness uniformity < 85.0%, Not allowable 亮度均匀性 < 85.0%, 不允许.	MA	
	LCD bright spots/dark spots 玻璃亮点/暗点	Under 6 inches 6 寸以下	1.D≤0.10mm, Ignore (忽略) . 2.0.10mm < D≤0.20mm; N≤2; DS≥10mm. 3.D > 0.20mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤3; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤4; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
	Backlight black dots/white dots 背光黑点/白点	Under 6 inches 6 寸以下	1.D≤0.15mm, Ignore (忽略) . 2.0.15mm < D≤0.30mm; N≤2; DS≥10mm. 3.D > 0.30mm, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.D≤0.20mm, Ignore (忽略) . 2.0.20mm < D≤0.40mm; N≤3; DS≥10mm. 3.D > 0.40mm, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.D≤0.25mm, Ignore (忽略) . 2.0.25mm < D≤0.50mm; N≤4; DS≥10mm. 3.D > 0.50mm, Not allowable (不允许) .		MI
	Linear foreign bodies 线状异物	Under 6 inches 6 寸以下	1.W≤0.05mm; L≤5mm, Ignore (忽略) . 2.0.05mm < W≤0.10mm ; L≤5mm ; N≤2; DS≥10mm. 3.0.10mm < W; 5mm < L, Not allowable (不允许) .		MI
		6~10.0 inches 6 寸~10.0 寸	1.W≤0.07mm; L≤5mm, Ignore (忽略) . 2.0.07mm < W≤0.12mm ; L≤10mm ; N≤3 ; DS≥10mm. 3.0.12mm < W; 10mm < L, Not allowable (不允许) .		MI
		More than 10 inches 10 寸以上	1.W≤0.10mm; L≤5mm, Ignore (忽略) . 2.0.10mm < W≤0.15mm ; L≤10mm ; N≤4 ; DS≥10mm. 3.0.15mm < W; 10mm < L, Not allowable (不允许) .		MI

Material 检验区域	Inspection items 检验项目	Product size 适用尺寸	Inspection standards 检验规格	Category 缺陷类别	
Display Screen 模组	White/Black print 白印/黑印	Full size 全尺寸	Use ND5% filter masking, visual invisibility is OK 使用 ND5%遮盖，目视不可见即为 OK.		MI
	Interference pattern/Newtonian pattern 干涉纹/牛顿纹	Full size 全尺寸	Not allowable 不允许.		MI
	Membranes displacement 膜材移位	Full size 全尺寸	Not allowable 不允许.		MI
	Color blocks 色斑	Full size 全尺寸	Use ND5% filter masking, visual invisibility is OK /使用 ND5%遮盖，目视不可见即为 OK.		MI
	Display abnormal 画异	Full size 全尺寸	Not allowable 不允许.	MA	
	No display 无显示	Full size 全尺寸	Not allowable 不允许.	MA	
	Line/Missing Drawing 线条/缺画	Full size 全尺寸	Not allowable 不允许.	MA	
	Splash screen 闪屏	Full size 全尺寸	Not allowable 不允许.	MA	
	LCD grid LCD 网格	Full size 全尺寸	Not allowable 不允许.	MA	
	Afterimage 残影	Full size 全尺寸	Not allowable 不允许.	MA	
	Wrong viewing angle 可视角错误	Full size 全尺寸	Not allowable 不允许.	MA	
TP	No touch 无触摸	Full size 全尺寸	Not allowable 不允许.	MA	
	Touch the jump point 触摸跳点	Full size 全尺寸	Not allowable 不允许.	MA	
	Touch not sensitive 触摸不灵敏	Full size 全尺寸	Not allowable 不允许.	MA	